



home  
automation



lighting




electric



furniture

**ORNO**<sup>®</sup>

LIVING INNOVATIONS

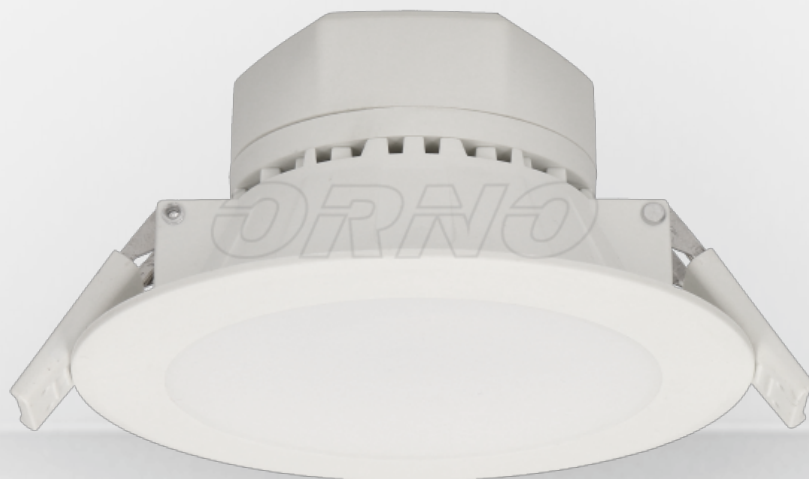

## DATA SHEET

Flush mounted LED downlight AURA, 7W, 4000K

symbol: **OR-OD-6048WLX4**

**Manufacturer:**







ORNO-LOGISTIC Sp. z o.o.  
ul. Katowicka 134, 43-190 Mikołów  
tel: 32 43 43 110  
www.orno.pl

ISBN 5901752489295



5 901752 489295 >

## Product **versions:**

	<b>Flush mounted LED downlight AURA, 7W, 4000K</b> OR-OD-6048WLX4	: 7W Luminous flux: 570lm Colour temperature: 4000K	ISBN 5901752489295  5 901752 489295 >
	<b>Flush mounted LED downlight AURA, 7W, 3000K</b> OR-OD-6048WLX3	: 7W Luminous flux: 520lm Colour temperature: 3000K	ISBN 5901752489288  5 901752 489288 >
	<b>Flush mounted LED downlight AURA, 10W, 3000K</b> OR-OD-6049WLX3	: 10W Luminous flux: 850lm Colour temperature: 3000K	ISBN 5901752489301  5 901752 489301 >
	<b>Flush mounted LED downlight AURA, 10W, 4000K</b> OR-OD-6049WLX4	: 10W Luminous flux: 900lm Colour temperature: 4000K	ISBN 5901752489318  5 901752 489318 >
	<b>Flush mounted LED downlight AURA, 12W, 3000K</b> OR-OD-6063WLX3	: 12W Luminous flux: 950lm Colour temperature: 3000K	ISBN 5902560321906  5 902560 321906 >
	<b>Flush mounted LED downlight AURA, 12W, 4000K</b> OR-OD-6063WLX4	: 12W Luminous flux: 1000lm Colour temperature: 4000K	ISBN 5902560321913  5 902560 321913 >

## The main **features:**

Use of the LED technology guarantees high energy efficiency and long life Can be easily mounted in a suspended ceiling Built-in LED driver.



LUMINOUS FLUX:  
570lm

K

COLOUR  
TEMPERATURE:  
4000K



INSTALLATION:  
flush mounting

## Technical **specifications:**

### General Information

Power supply:	230V~, 50Hz
Light source:	LED SMD
Colour rendering index (ra):	>80
Luminous flux:	570lm
Colour temperature:	4000K
Material of the lampshade:	acrylic glass (PMMA)
Protection rating:	IP20
Dimmer:	✘ no
Installation:	flush mounting
Colour:	white
Dimensions (width x height x depth [mm]):	Ø95 / 56,2
Other features:	built-in power supply